

DUNNA

Technical datasheet


Emergency Lighting
Ref. DAL3-100M-2



UNE 60598-2-22
230V 50/60HZ

Emergency Lighting: DUNNA. Reference: DAL3-100M-2, manufactured by Normalux. Lumens 120 lm. Autonomy (h) 3h. Operating mode: Maintained. Installation: Surface Mounting. Light source: Led. Battery of: Ni-Cd 4,8V/750mAh. IP: 44. IK: 07. Version: Self-test. Color: Aluminium. Casing: Self-Extinguishing ABS+PC. Voltage: 230V 50/60Hz. Dimensions (mm): 322 x 120 x 45 mm. Manufactured according UNE 60598-2-22 regulations. Compatible with S-TE remote control.

Dimensions (mm):

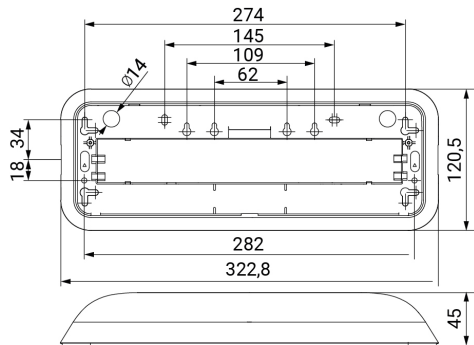

Lumens	120 lm
Color temperatures (K)	5700
Light source	Led
Autonomy (h)	3h
Battery	Ni-Cd 4,8V/750mAh
Power (W)	2W
Operating mode	Maintained
Class	II
IP	44
IK	07
Operating temperature (°C)	5 to 35
Remote control	Yes

Photometric data:

