

VOLUTTA ENCASTRABLE

Technical datasheet


Emergency Lighting
Ref. VTL3-100-1



UNE 60598-2-22
230V 50/60HZ

Emergency Lighting: VOLUTTA ENCASTRABLE. Reference: VTL3-100-1, manufactured by Normalux. Lumens 100 lm. Autonomy (h) 3h. Operating mode: Maintained - Non Maintained. Installation: Recessed Mounting. Light source: Led. Battery of: Ni-MH 4,8V/1,5Ah. IP: 42. IK: 04. Version: Standard. Color: Anthracite. Casing: Self-Extinguishing ABS+PC. Voltage: 230V 50/60Hz. Dimensions (mm): 345 x 153 x 40 mm. Manufactured according UNE 60598-2-22 regulations. Compatible with S-TE remote control.

Dimensions (mm):

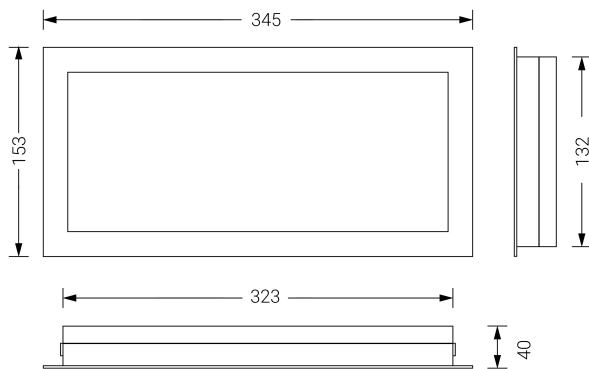

Lumens	100 lm
Color temperatures (K)	5700
Light source	Led
Autonomy (h)	3h
Battery	Ni-MH 4,8V/1,5Ah
Power (W)	5W
Operating mode	Maintained - Non Maintained
Class	II
IP	42
IK	04
Operating temperature (°C)	5 to 35
Remote control	Yes

Photometric data:

