

Kit for conversion in emergency lighting




# NORMALUX Kenlux




 Maintained

## Technical features

- Kit for conversion in emergency lighting.
- Reference Norm: EN 60924.
- Charge signaling with a LED.
- Power 230V, 50/60 Hz.
- Charging time 24 hours.
- Possibility of remote control.



	A	B	C	D	E	F
KEN 1-18	163	32	173	39	127	22
KEN 3-18	163	32	173	39	176	33
KEN 1-36	163	32	173	39	127	22
KEN 3-36	163	32	173	39	176	33
KEN 1-58	163	32	173	39	169	22
KEN 3-58	163	32	173	39	235	33
KEN S1UNIV	163	32	173	39	295	33
KEN 1-14 T5	163	32	173	39	353	33
KEN 1-21 T5	163	32	173	39	353	33
KEN 1-24 T5	163	32	173	39	353	33
KEN 1-28 T5	163	32	173	39	353	33
KEN 1-35 T5	163	32	173	39	353	33
KEN 1-39 T5	163	32	173	39	353	33
KEN 1-49 T5	163	32	173	39	353	33
KEN 1-54 T5	163	32	173	39	353	33
KEN1-UNI	41	239	44	295	33	

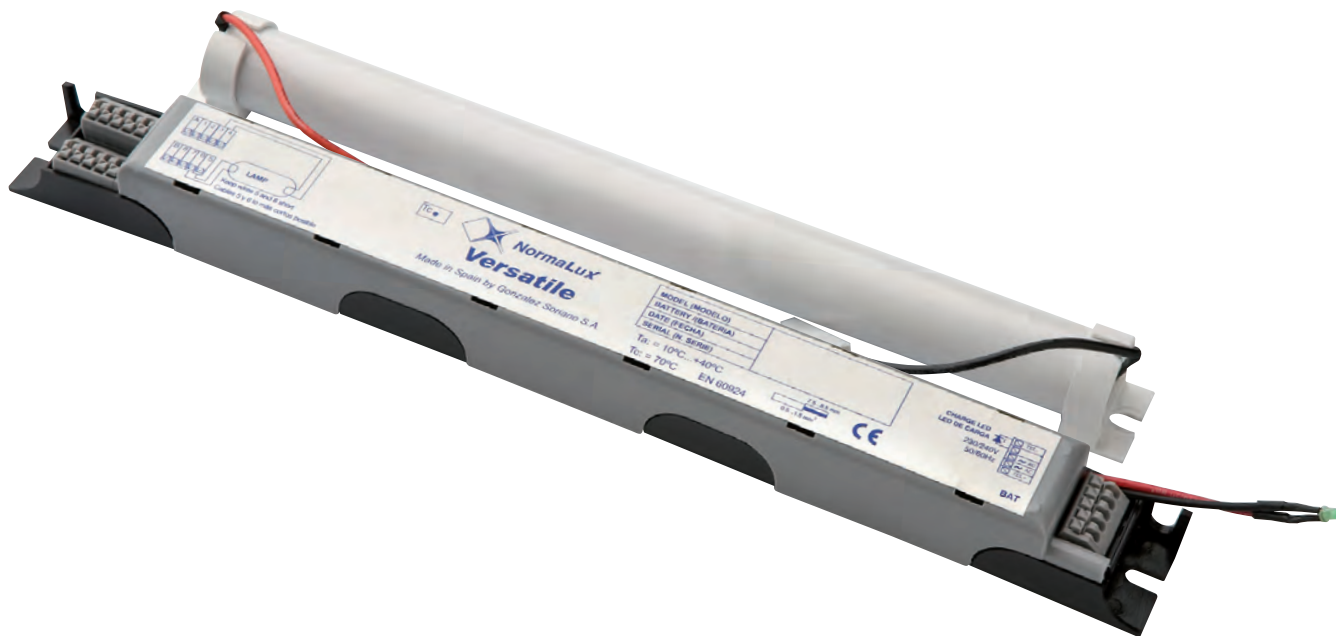

# NORMALUX Versatile



 Maintained

## Technical features

- 230V 50/60 Hz.
- Norms EN 55015, EN 61347-2-7, EN 61000-3-2.
- Low Power Directive EC 72/23/CE.
- Electromagnetic Compatibility Directive 2004/108/CE.
- Temperature: 10°C a 40°C.
- Batteries: two options available changing the position of an internal bridge:
  - Batteries Ni/Cd de 7.2V/1.5Ah 1 h Autonomy.
  - Batteries Ni/Cd de 7.2V/4 Ah 3 h Autonomy.


## Physical features

- Size: 316 mm x 32mm x 25 mm (height)
- Housing: Polycarbonate plastic.
- Cage clamps in the input and output for lamps and connection to electronic ballast.

## Accessories



Remote controls  
**S-TE**



	A	B	C	D	E	F
<b>VKIT</b>	316	25	32	304	255	23
<b>VKIT3</b>	316	25	32	304	360	33